


HT54-18X(ND)-F

Double Glass TOPCon PV Module

HIGH High power

435W/440W
445W/450W/455W

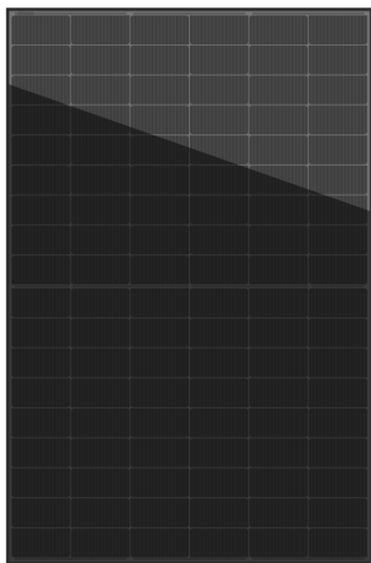

- Module Efficiency 23.3%
- No. of Cells 108(6×18)
- Weight 24.0(±0.5)kg
- Dimensions 1722×1134×30mm
- Bifaciality 80(±5)%



Shanghai Aerospace Automobile
Electromechanical Co., Ltd.
Website: www.ht-saae.com
E-mail: pvmarketing@ht-saae.com



Factory:
Lianyungang Shenzhou New Energy CO., Ltd.



Half cut cell technology can reduce the internal power loss and improve module overall power. Excellent heat dissipation avoids hot spot production.

15Ys

Products warranty

30Ys

Warranty on power output

EL

Microcrack resistant
Double glass structure enhance reliability,
double EL tested of high quality control.



Entire module certified to with stand extreme wind(2400 Pa) and snow loads (5400 Pa)

TOPCon

Double glass, The optimized number and width of main gate lines, Maximize the light receiving area of modules and Reduce module power consumption.



1500V

Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs.



2%

All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

0~+3%


Positive tolerance
0~+3% guaranteed

Anti PID

PID resistant

Comprehensive and first-rate certification system

IEC 61215, IEC 61730 Latest Standard
SA 8000, ISO 9001, ISO 14001 and ISO 45001
meeting the highest international standards
Strict quality control



Electrical Characteristics (STC)

Module Type	HT54-18X(ND)-F				
Maximum Power(Pmax)	435W	440W	445W	450W	455W
Open Circuit Voltage(Voc)	38.4V	38.6V	38.7V	38.8V	39.1V
Short Circuit Current(Isc)	14.31A	14.39A	14.47A	14.55A	14.61A
Maximum Power Voltage(Vmp)	32.0V	32.2V	32.4V	32.5V	32.7V
Maximum Power Current(Imp)	13.60A	13.68A	13.76A	13.85A	13.92A
Module Efficiency	22.3%	22.5%	22.8%	23.0%	23.3%
Power Tolerance	0 ~ +3%				
Maximum System Voltage	1500V DC(IEC)				
Maximum Series Fuse Rating	25A				
Operating Temperature	-40°C to +85°C				

* STC: AM 1.5, Irradiance 1000W/m², module temperature 25°C

Electrical Characteristics (NMOT)

Module Type	HT54-18X(ND)-F				
Maximum Power(Pmax)	331W	335W	338W	342W	346W
Open Circuit Voltage(Voc)	36.9V	37.1V	37.2V	37.2V	37.5V
Short Circuit Current(Isc)	11.53A	11.60A	11.66A	11.73A	11.77A
Maximum Power Voltage(Vmp)	30.7V	30.9V	31.1V	31.2V	31.4V
Maximum Power Current(Imp)	10.78A	10.84A	10.87A	10.96A	11.02A

* NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

Bifacial output-rearside power gain

5%	Maximum Power(Pmax)	457W	462W	467W	473W	478W
	Module Efficiency	23.4%	23.7%	23.9%	24.2%	24.5%
15%	Maximum Power(Pmax)	500W	506W	512W	518W	523W
	Module Efficiency	25.6%	25.9%	26.2%	26.5%	26.8%
25%	Maximum Power(Pmax)	544W	550W	556W	563W	569W
	Module Efficiency	27.8%	28.2%	28.5%	28.8%	29.1%

Nominal Module Operating Temperature(NMOT) 43±2°C

Temperature Coefficient of Pmax γ (Pm) -0.29%/°C

Temperature Coefficient of Voc β (Voc) -0.25%/°C

Temperature Coefficient of Isc α (Isc) 0.046%/°C

Solar Cells Monocrystalline

No. of Cells 108 (6×18)

Dimensions 1722×1134×30mm

Weight 24.0 (±0.5) kg

Glass (Front /Back) High transmission coated tempered glass/Heat strengthened glass


Frame Anodized aluminum alloy

Junction Box IP68


Cable 4mm² (IEC) Length: (+) 200mm, (-) 300mm or customized

Connectors MC4 / MC4 Compatible


Packaging Configuration 36 pcs/box: 936 pcs/ 40' HQ Container

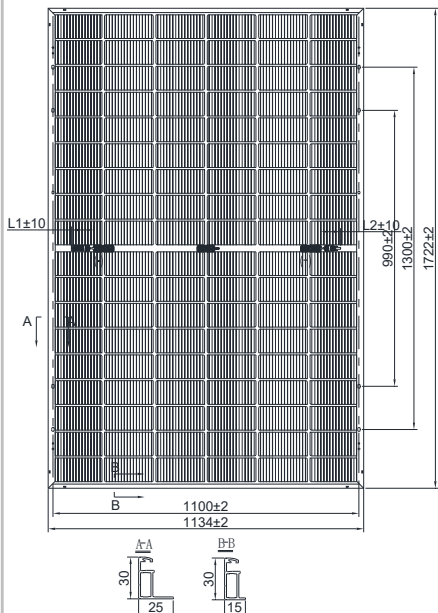

IV Curves

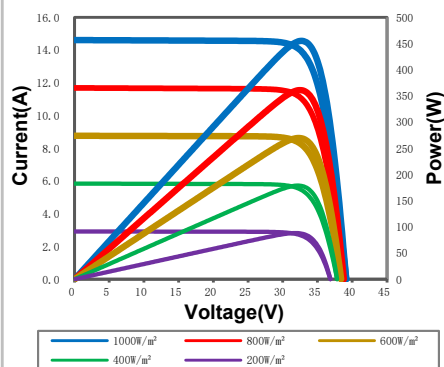

Warranty

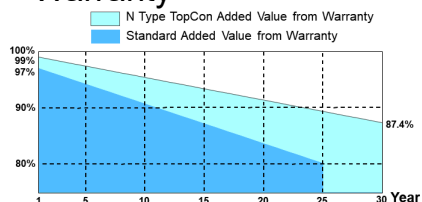

15-year product warranty*

30-year warranty on power output*

* Specific information is referred to the product quality guarantee

*The module recycling should be carried out by the professional institutions at the end of module life cycle

*Copyright@2024V4 Specifications are subject to change without further notification